



VER: A

DATE:19.04.19

Li Polymer Battery Specification

MODEL/ : AUK 1435136 7.4V 4000 mAh

Prepared By/Date	Checked By/Date	Approved By/Date
CB/2019.04.19	MYC/2019.04.19	LSW/2019.04.19

Customer Approval	Signature/Date
	Company Name
	Diskio Pi
	Company Stamp

VER: A

DATE:19.04.19

Amendment Records

Edition	Description	Prepared by	Approved by	Date
A	First Edition			

1 Scope

This specification is applied to the reference battery in this Specification and manufactured by Hunan AUK New Energy Co.,Ltd.

2 Product Specification

Table 1

No.	Item	General Parameter		Remark
		Typical		
1	Rated Capacity	Typical	4000mAh	Standard discharge (0.2C C ₅ A) after Standard charge 0.2C ₅ A
		Minimum	4000mAh	
2	Combination Method	2S1P		Battery Cell: 3.7V 4000mAh (3.7V 4000mAh)
2	Nominal Voltage	7.4V		Mean Operation Voltage
3	Voltage at end of Discharge	5.50V		Discharge Cut-off Voltage
4	Charging Voltage	8.4±0.03V		
5	Internal Impedance	≤40mΩ		Internal resistance measured at AC 1KHz after 50% charge The measure must uses the new batteries that within one week after shipment and cycles less than 5 times
6	Standard charge	Constant Current 0.5C ₅ A Constant Voltage 8.4V 0.01 C ₅ A cut-off		Charge time : Approx 4.0h
7	Standard discharge	Constant current 0.2 C ₅ A end voltage5.5V		
8	Fast charge	Constant Current 1C ₅ A Constant Voltage 8.4V 0.01 C ₅ A cut-off		Charge time : Approx 2.5h

VER: A

DATE:19.04.19

Continuous the table 1

No.	Item	General Parameter	Remark
9	Fast discharge	Constant current 1 C ₅ A end voltage 5.5V	
10	Maximum Continuous Charge Current	1 C ₅ A	
11	Maximum Peak Discharge Current	1.5C ₅ A	
12	Operation Temperature Range	Charge : 0~45°C	60±25%R.H. Bare Cell
		Discharge : -20~60°C	
13	Storage Temperature Range	Less than 1 year: -20~25°C	60±25%R.H. at the shipment state
		less than 3 months: -20~40°C	
14	Battery Cell Dimension	Height: Max 6.7mm	Initial Dimension
		Width: Max 35.0mm	
		Thickness: Max 134.0mm	
	Battery Pack Dimension	Height: Max 14.0mm	
		Width: Max 35.0mm	
		Thickness: Max 136.0mm	

3 Performance And Test Conditions

3.1 Standard Test Conditions

Test should be conducted with new batteries within one week after shipment from our factory and the cells shall not be cycled more than five times before the test. Unless otherwise specified, test and measurement shall be done under temperature of 20 ± 5 °C and relative humidity of 45~85%. If it is judged that the test results are not affected by such conditions, the tests may be conducted at temperature 15~30°C and humidity 25~85%RH.

3.2 Measuring Instrument or Apparatus

3.2.1 Dimension Measuring Instrument

The dimension measurement shall be implemented by instruments with equal or more precision scale of 0.01mm.

3.2.2 Voltmeter

Standard class specified in the national standard or more sensitive class having inner impedance more than 10kΩ/V

3.2.3 Ammeter

Standard class specified in the national standard or more sensitive class. Total external resistance including ammeter and wire is less than 0.01Ω.

3.2.4 Impedance Meter

Impedance shall be measured by a sinusoidal alternating current method(1kHz LCR meter).

3.3 Standard Charge\Discharge

3.3.1 Standard Charge : Test procedure and its criteria are referred as follows:

$$0.5C_5A = 2000mA$$

Charging shall consist of charging at a $0.5C_5A$ constant current rate until the cell reaches 8.4V. The cell shall then be charged at constant voltage of 8.4 volts while tapering the charge current. Charging shall be terminated when the charging current has tapered to $0.01 C_5A$. Charge time : Approx 4.0h, The cell shall demonstrate no permanent degradation when charged between 0 °C and 45 °C.

3.3.2 Standard Discharge

$$0.2C_5A = 800mA$$

Cells shall be discharged at a constant current of $0.2 C_5A$ to 5.5volts @ $20^\circ \pm 5C^\circ$

3.3.3 If no otherwise specified, the rest time between Charge and Discharge amount to 30min.

3.4 Appearance

There shall be no such defect as flaw, crack, rust, leakage, which may adversely affect commercial value of battery.

3.5 Initial Performance Test

Table 2

Item	Test Method and Condition	Requirements
(1) Open-Circuit Voltage	The open-circuit voltage shall be measured within 24 hours after standard charge.	$\geq 3.8V$
(2) Internal impedance	Internal resistance measured at AC 1KHz after 50% charge.	$\leq 40m\Omega$
(3) Minimal Rated Capacity	The capacity on 0.2C ₅ A discharge till the voltage tapered to 5.5V shall be measured after rested for 30min then finish standard charge.	Discharge Capacity $\geq 4000mAh$

3.6 Temperature Dependence of discharge capacity

Cells shall be charged per 3.3.1 and discharged @0.2 C₅A to 5.5volts. Except to be discharged at temperatures per Table 3. Cells shall be stored for 3 hours at the test temperature prior to discharging and then shall be discharged at the test temperature. The capacity of a cell at each temperature shall be compared to the capacity achieved at 23 °C and the percentage shall be calculated. Each cell shall meet or exceed the requirements of Table 3.

Discharge Temperature	-10°C	0°C	23°C	60°C
Discharge Capacity (0.2 C ₅ A)	50%	80%	100%	95%

3.7 Cycle Life and Leakage-Proof

No.	Item	Criteria	Test Conditions
1	Cycle Life (0.5 C ₅ A)	Higher than 70% of the Initial Capacities of the Cells	Carry out 500cycle Charging/Discharging in the below condition. ◆Charge:Standard Charge, per 3.3.1 ◆Discharge:0.5 C ₅ A to 5.5V ◆Rest Time between charge/discharge:30min. ◆Temperature:20±5°C
2	Leakage-Proof	No leakage (visual inspection)	After full charge with standard charge, store at 55±3°C,60±10%RH for 1 week.

4. Mechanical characteristics and Safety Test

(Mechanical characteristics)

No.	Items	Test Method and Condition	Criteria
1	Vibration Test	After standard charging, fixed the cell to vibration table and subjected to vibration cycling that the frequency is to be varied at the rate of 1Hz per minute between 10Hz an 55Hz, the excursion of the vibration is 1.6mm. The cell shall be vibrated for 30 minutes per axis of XYZ axes.	No leakage No fire
2	Drop Test	The cell is to be dropped from a height of 1 meter twice onto concrete ground.	No explosion, No fire, no leakage.

Table 6

(Safety Test)

Item	Battery Condition	Test Method	Requirements
Crush	Fresh, Fully charged	Crush between two flat plates. Applied force is about 13kN(1.72Mpa) for 30min.	No explosion, No fire
Short Circuit (20°C)	Fresh, Fully charged	Each test sample battery, in turn, is to be short-circuited by connecting the (+) and (-) terminals of the battery with a Cu wire having a maximum resistance load of 0.1Ω. Tests are to be conducted at room temperature(20±2°C).	No explosion, No fire The Temperature of the surface of the Cells are lower than 150°C
Short Circuit	Fresh, Fully charged	Each test sample battery, in turn, is to be short-circuited by connecting the (+) and (-) terminals of the battery with a Cu wire having a maximum resistance load of 0.1Ω. Tests are to be conducted at temperature(60±2°C).	No explosion, No fire The Temperature of the surface of the Cells are lower than 150°C
Impact	Fresh, Fully charged	A 56mm diameter bar is inlayed into the bottom of a 10kg weight. And the weight is to be dropped from a height of 1m onto a sample battery and then the bar will be across the center of the sample.	No explosion, No fire
Forced Discharge	Fresh, Fully charged	Discharge at a current of 1 C ₅ A for 2.5h.	No explosion, No fire
Nail Pricking (3mm)	Fresh, Fully charged	Prick through the sample battery with a nail having a diameter of 3mm and remain 2h.	No explosion, No fire

5. Protection Circuit

5.1 PCB


Item	Symbol	Content	Criterion
Over charge Protection	V_{DET1}	Over charge detection voltage	$4.30\pm 0.05V$
	tV_{DET1}	Over charge detection delay time	50—270ms
	V_{REL1}	Over charge release voltage	$4.15\pm 0.05V$
Over discharge protection	V_{DET2}	Over discharge detection voltage	$2.40\pm 0.1V$
	tV_{DET2}	Over discharge detection delay time	5-25ms
	V_{REL2}	Over discharge release voltage	$3.10\pm 0.1V$
Over current protection	V_{DET3}	Over current detection voltage	$150\pm 30mV$
	I_{DP}	Over current detection current	$3.0\pm 1.0A$
	tV_{DET3}	Detection delay time	5-26ms
		Release condition	Cut load
Short protection		Detection condition	Exterior short circuit
	T_{SHORT}	Detection delay time	5-50ms
		Release condition	Cut short circuit
Interior resistance	R_{DS}	Main loop electrify resistance	$V_C=8.4V, R_{DS}\leq 70m\Omega$
Current consumption	I_{DD}	Current consume in normal operation	$3.0\mu A$ Type $6.0\mu A$ Max

Standard

5.2 Parts list

NO.	Location	Part name	Specification	Q'ty
1	U1	Battery protection IC	DW01+	1
2	U2	Silicon MOSFET	8205A	1
3	R1	Resistance	SMD 100Ω±5%	1
4	R2	Resistance	SMD 1KΩ±5%	1
5	C1	Capacitance	SMD 0.1μF	1

5.3 Application Circuit

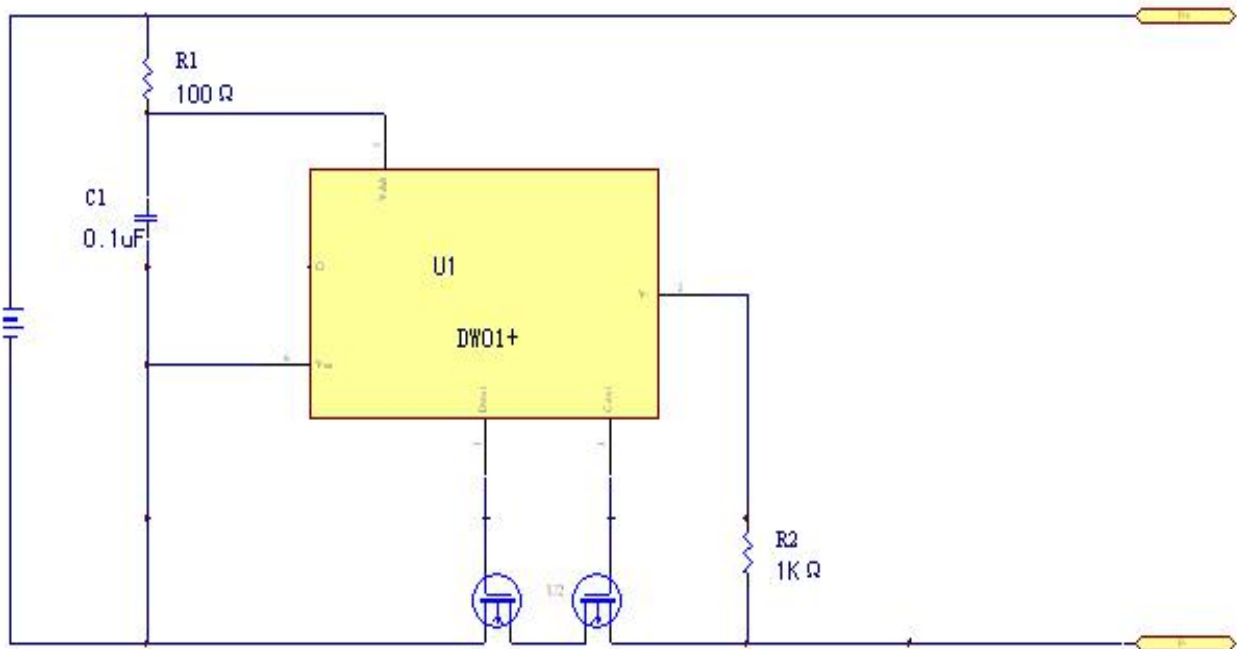

6. Handling of Cells

6.1 Consideration of strength of film package

1) Soft Aluminium foil

Easily damaged by sharp edge parts such as pins and needles, Ni-tabs, comparing with metal-can-cased LIB.

2). Sealed edge may be damaged by heat above 100°C, bend or fold sealed edge.

6.2 Prohibition short circuit

Never make short circuit cell. It generates very high current which causes heating of the cells and may cause electrolyte leakage, gassing or explosion that are very dangerous.

The LIP tabs may be easily short-circuited by putting them on conductive surface.

Such outer short circuit may lead to heat generation and damage of the cell.

An appropriate circuitry with PCB shall be employed to protect accidental short circuit of the battery pack.

6.3. Mechanical shock

LIP cells have less mechanical endurance than metal-can-cased LIB.

Falling, hitting, bending, etc. may cause degradation of LIP characteristics.

6.4 Handling of tabs

The battery tabs are not so stubborn especially for aluminum tab.

Don't bend tab.

Do not bend tabs unnecessarily.

7. Notice for Designing Battery Pack

7.1 Pack toughness

Battery pack should have sufficient strength and the LIP cell inside should be protected from mechanical shocks.

7.2 Cell fixing

The LIP cell should be fixed to the battery pack by its large surface area.

No cell movement in the battery pack should be allowed.

7.3 Inside design

No sharp edge components should be inside the pack containing the LIP cell.

7.4 Tab connection

Ultrasonic welding or spot welding is recommended for LIP tab connection method.

Battery pack should be designed that shear force are not applied to the LIP tabs.

If apply manual solder method to connect tab with PCB, below notice is very important to ensure battery performance:

- The solder iron should be temperature controlled and ESD safe;

- Soldering temperature should not exceed 350°C;

- Soldering time should not be longer than 3s;

- Soldering times should not exceed 5 times, Keep battery tab cold down before next time soldering;

- Directly heat cell body is strictly prohibited, Battery may be damaged by heat above approx. 100°C

7.5 For mishaps

Battery pack should be designed not to generate heat even when leakage occurs due to mishaps.

- 1) Isolate PCB (Protection Circuit Module) from leaked electrolyte as perfectly as possible.
- 2) Avoid narrow spacing between bare circuit patterns with different voltage.
(Including around connector)
- 3) LIP battery should not have liquid from electrolyte, but in case If leaked electrolyte touch bare circuit patterns, higher potential terminal material may dissolve and precipitate at the lower potential terminal, and may cause short circuit. The design of the PCB must have this covered.

8. Notice for Assembling Battery Pack

Shocks, high temperature, or contacts of sharp edge components should not be allowed in battery pack assembling process.

9. Others

9.1.Cell connection

- 1) Direct soldering of wire leads or devices to the cell is strictly prohibited.
- 2) Lead tabs with pre-soldered wiring shall be spot welded to the cells.

Direct soldering may cause damage of components, such as separator and insulator, by heat generation.

9.2.Prevention of short circuit within a battery pack

Enough insulation layers between wiring and the cells shall be used to maintain extra safety protection.

The battery pack shall be structured with no short circuit within the battery pack, which may cause generation of smoke or firing.

9.3. Prohibition of disassembly

1) Never disassemble the cells

The disassembling may generate internal short circuit in the cell, which may cause gassing, firing, explosion, or other problems.

2) Electrolyte is harmful

LIP battery should not have liquid from electrolyte flowing, but in case the electrolyte come into contact with the skin, or eyes, physicians shall flush the electrolyte immediately with fresh water and medical advice is to be sought.

9.4 Prohibition of dumping of cells into fire

Never incinerate nor dispose the cells in fire. These may cause explosion of the cells, which is very dangerous and is prohibited.

9.5 Prohibition of cells immersion into liquid such as water

The cells shall never be soaked with liquids such as water, seawater, drinks such as soft drinks, juices, coffee or others.

9.6 Battery cells replacement

The battery replacement shall be done only by either cells supplier or device supplier and never be done by the user.

9.7 Prohibition of use of damaged cells

The cells might be damaged during shipping by shock. If any abnormal features of the cells are found such as damages in a plastic envelop of the cell, deformation of the cell package, smelling of an electrolyte, an electrolyte leakage and others, the cells shall never be used any more.

The Cells with a smell of the electrolyte or a leakage shall be placed away from fire to avoid firing or explosion.

10. Period of Warranty

The period of warranty is one year from the date of shipment. 3DCRAN guarantees to give a replacement in case of cells with defects proven due to manufacturing process instead of the customer abuse and misuse.

		VER: A
		DATE:19.04.19

11. Storing the Batteries

The batteries should be stored at room temperature, charged to about 30% to 50% of capacity.

We recommend that batteries be charged about once per half a year to prevent over discharge.


12. Other The Chemical Reaction

Because batteries utilize a chemical reaction, battery performance will deteriorate over time even if stored for a long period of time without being used. In addition, if the various usage conditions such as charge, discharge, ambient temperature, etc. are not maintained within the specified ranges the life expectancy of the battery may be shortened or the device in which the battery is used may be damaged by electrolyte leakage. If the batteries cannot maintain a charge for long periods of time, even when they are charged correctly, this may indicate it is time to change the battery.

VER: A

DATE:19.04.19

15. Battery Drawing

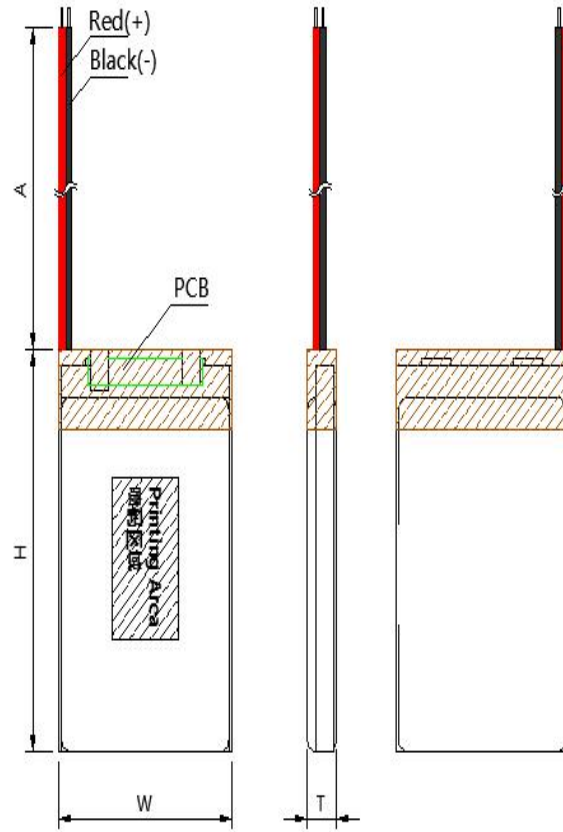

Units	mm	PCB		Yes	
Wire	1571/26#	A	30±3	Connector	No
T	Max. 14.0	W	Max.35.0	H	Max. 136.0
Drawer		Checked	Approved		Date
		1435136 DRAWING			